

ROHS  
COMPLIANT

ENVIRONMENTAL  
ISO 14001  
SYSTEM REGISTERED

ISO 9001  
CERTIFIED  
QUALITY SYSTEM REGISTERED



ISO/IEC-17025  
LABORATORY TESTING ACCREDITED

## SURFACE PREPARATION PRODUCTS

# VpCI®-416



## PRODUCT DESCRIPTION

VpCI®-416 is a heavy-duty water-based alkaline cleaner and degreaser offering unique flash corrosion protection. VpCI®-416 can provide corrosion protection for up to 6 months during indoor storage. VpCI®-416 is formulated to meet the requirements for cleaning and corrosion protection of parts and stored equipment. VpCI®-416 penetrates to remove greases and oil deposits from machinery, engines, vehicles, construction equipment, and cranes in either industrial or marine applications.

VpCI®-416 can be metered into power washers, steam cleaners, dip tanks, and other cleaning equipment. Along with good detergent properties, VpCI®-416 is hard water stable.

While most cleaning compounds available on the market today are simple blends of surfactants and detergents which limit their cleaning effectiveness, VpCI®-416 offers improved cleaning plus multimetal corrosion protection action in one step, resulting in significant savings. VpCI®-416 can aid in the removal of grease, drawing and buffing compounds, machining fluids, and other hydrocarbon deposits.

## FEATURES

- Heavy-duty cleaning and degreasing functionality
- Multimetal inhibition protects ferrous metals, yellow metals, and aluminum
- Provides exceptional resistance to pitting corrosion

- Non-toxic, non-corrosive, and does not contain nonylphenoethoxylates
- Mild foaming
- Hard water tolerant
- Recovers completely after freeze-thaw cycle in storage

## EFFECTIVE USES

- Cleaning oil-contaminated machinery and parts
- Removing protective oils prior to painting, pickling, or machining
- Protecting parts during dry storage (when used in rinse tanks)
- Works well in multiple-stage parts washers

## VpCI®-416 DILUTION RATIO CHART

	Volume VpCI®-416 (US) per gallon water	Volume VpCI®-416 (Metric) per liter water	Dosage (%)
Light Cleaning	6.4 ounces (~3/4 cup)	50ml	5
Medium Cleaning	12.8 ounces (~1.5 cups)	100ml	10
Heavy Cleaning	25.6 ounces (~3 cups)	200ml	20



## PROPERTIES

Appearance	Slightly hazy yellow liquid
Exposure Time	20 seconds to 5 minutes
pH	12-12.7(Neat)
Density	8.6-8.8 lb/gal (1.03-1.05 kg/l)
Temperature Range	50°-300°F (10°-149°C)
Non-volatile Content	18-23%

## PACKAGING

VpCI-416 is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) drums, liquid totes, and bulk.



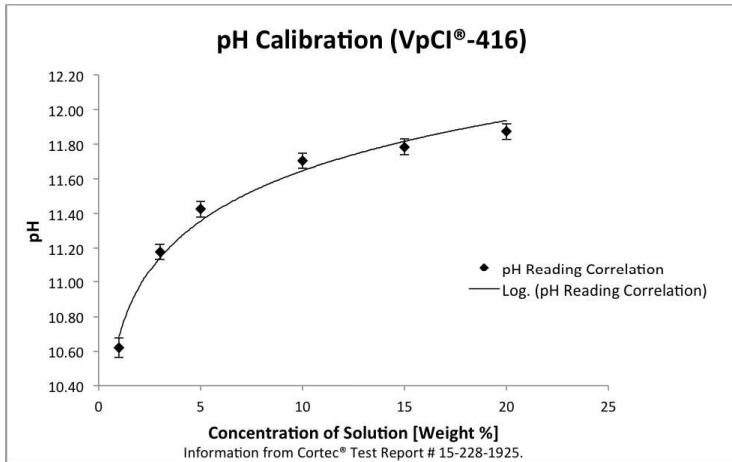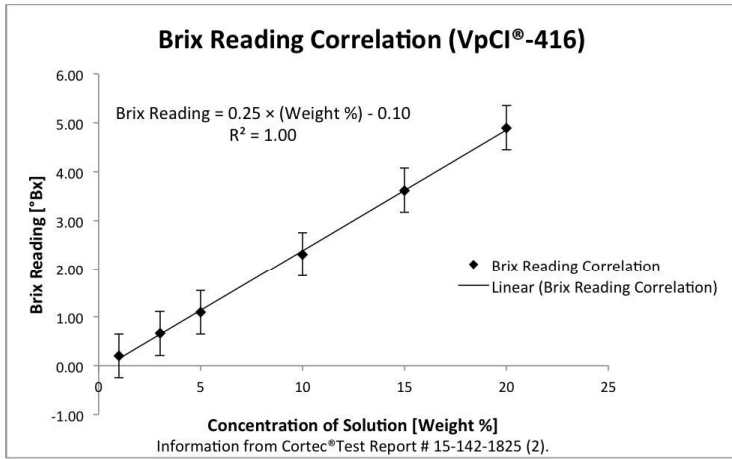

Please note the solutions used above were created using deionized water. Slight differences in water chemistry (dissolved solids, hardness, etc.) may lead to differences in readings. Please use these numbers as reference only. Contact Cortec® Technical Service with any questions.

**FOR INDUSTRIAL USE ONLY**  
**KEEP OUT OF REACH OF CHILDREN**  
**KEEP CONTAINER TIGHTLY CLOSED**  
**NOT FOR INTERNAL CONSUMPTION**  
**CONSULT SAFETY DATA SHEET FOR MORE INFORMATION**

#### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.  
 BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA  
 Phone (651) 429-1100, Fax (651) 429-1122  
 Toll Free (800) 4-CORTEC, E-mail [info@cortecvci.com](mailto:info@cortecvci.com)  
 Internet <http://www.cortecvci.com>

Printed on recycled paper 100% post consumer

Revised: 03/06/18. Supersedes: 11/29/17. ©Cortec Corporation 2002-2018 of Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2018, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.

Distributed by: